

Technical data

Voltage	U	230	V
Phase		1	~
Frequency		50	Hz
Speed		1380	RPM
Power consumption	P _e	280	W
Nominal current	I	1.2	A
Maximum current	I	1.5	A
Capacitor		06/400	µF
Ambient temperature	T _{amb min/max}	-25...40	°C
Insulation Class		CL.F	
IP Class Fan		IP55	
Weight		10.9	kg
Packing dimensions		510x510x315	mm

Fan details

Impeller blades	4
Impeller type	21
Impeller system	Y
Impeller material	SS



Control options

Triac controller	Yes
Transformer	Yes
Frequency drive	No
Intelligent Fan Drive	Yes

* All control options including single phase control frequency are available. Please contact Vostermans Ventilation Sales for more information

Characteristics

0 Pa 6650 m³/h
50 Pa 5500 m³/h

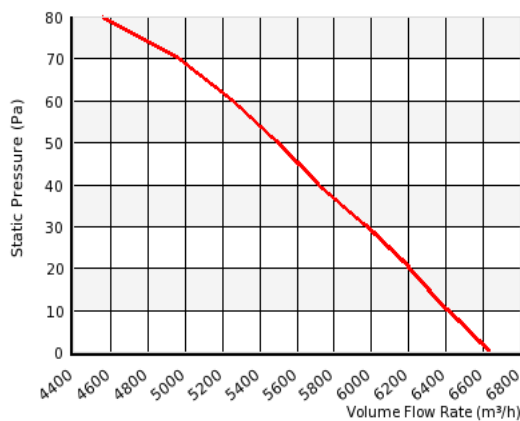


Please note: Picture may deviate from original product

Approval(s)




Wiring diagram - Fan

AA01 - CCW

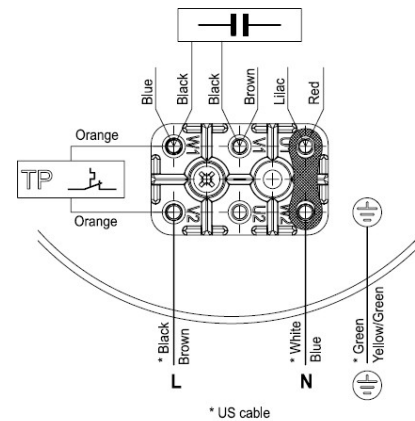

Dimensions

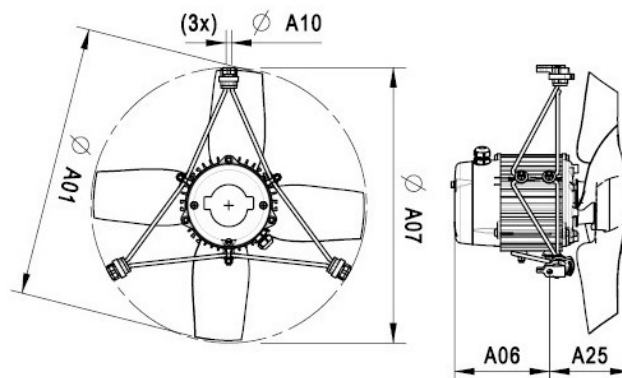

A01:	443 mm
A06:	155 mm
A07:	468 mm
A10:	9 mm
A25:	130 mm