

#### Technical data

|                     |                          |             |     |
|---------------------|--------------------------|-------------|-----|
| Voltage             | U                        | 230         | V   |
| Phase               |                          | 1           | ~   |
| Frequency           |                          | 50          | Hz  |
| Speed               |                          | 1400        | RPM |
| Power consumption   | P <sub>e</sub>           | 390         | W   |
| Nominal current     | I                        | 1.8         | A   |
| Maximum current     | I                        | 2.6         | A   |
| Capacitor           |                          | 10/400      | μF  |
| Ambient temperature | T <sub>amb min/max</sub> | -25...40    | °C  |
| Insulation Class    |                          | CL.F        |     |
| IP Class Fan        |                          | IP55        |     |
| Weight              |                          | 11.1        | kg  |
| Packing dimensions  |                          | 510x510x315 | mm  |

#### Fan details

|                   |    |
|-------------------|----|
| Impeller blades   | 4  |
| Impeller type     | 21 |
| Impeller system   | Y  |
| Impeller material | SS |


#### Control options

|                       |     |
|-----------------------|-----|
| Triac controller      | Yes |
| Transformer           | Yes |
| Frequency drive       | No  |
| Intelligent Fan Drive | Yes |

\* All control options including single phase control frequency are available. Please contact Vostermans Ventilation Sales for more information

#### Characteristics

0 Pa 8300 m<sup>3</sup>/h  
50 Pa 7150 m<sup>3</sup>/h

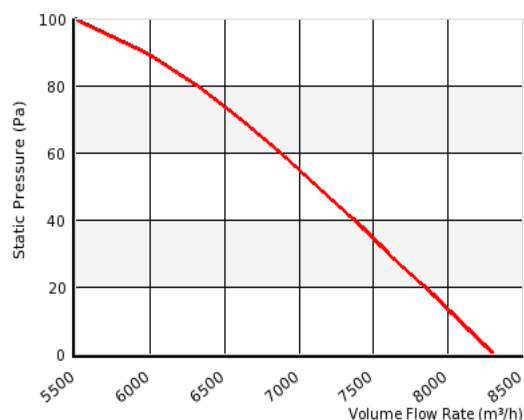


Please note: Picture may deviate from original product

#### Approval(s)




#### Wiring diagram - Fan

AA01 - CCW

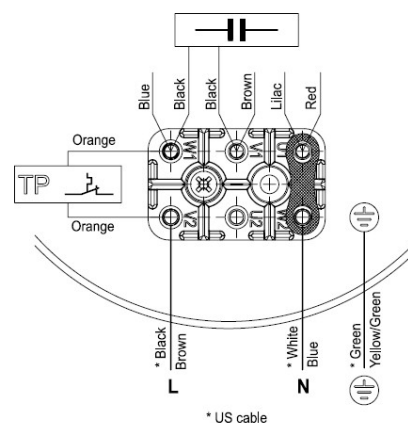

#### Dimensions

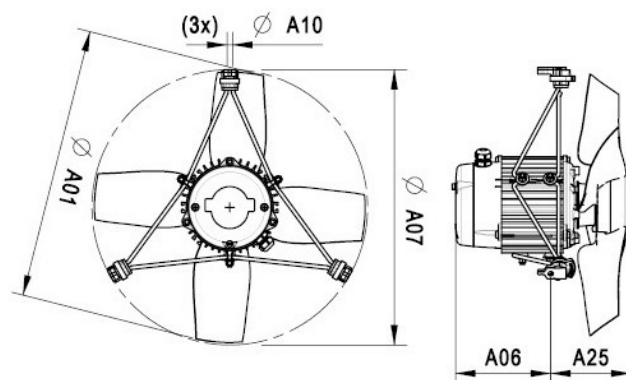

|      |        |
|------|--------|
| A01: | 493 mm |
| A06: | 150 mm |
| A07: | 520 mm |
| A08: | 9 mm   |
| A25: | 139 mm |