

Article number: V6S6300E10100

Productgroup: Panel fans



Technical data

Voltage	U	230	V
Phase		1	~
Frequency		50	Hz
Speed		920	RPM
Power consumption	P _e	530	W
Nominal current	I	2.6	A
Maximum current	I	3.0	A
Capacitor		16/400	μF
Ambient temperature	T _{amb min/max}	-25...40	°C
Insulation Class		CL.F	
IP Class Fan		IP55	
Weight		21.4	kg
Packing dimensions		870x870x395	mm

Fan details

Impeller blades	3
Impeller type	22
Impeller system	Y
Impeller material	SS



Control options

Triac controller	Yes
Transformer	Yes
Frequency drive	No
Intelligent Fan Drive	Yes

* All control options including single phase control frequency are available. Please contact Vostermans Ventilation Sales for more information

Characteristics

0 Pa 12000 m³/h
50 Pa 9550 m³/h

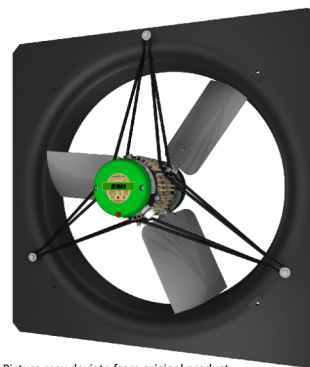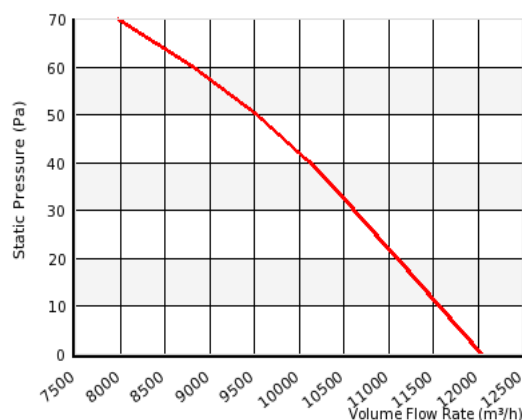


Please note: Picture may deviate from original product

Approval(s)




Wiring diagram - Fan

AA01 - CCW

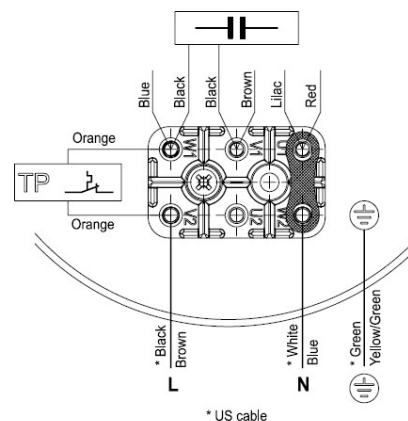

Dimensions

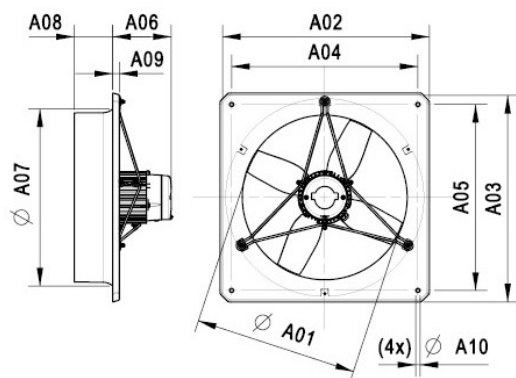

A01:	620 mm
A02:	835 mm
A03:	835 mm
A04:	750 mm
A05:	750 mm
A06:	220 mm
A07:	660 mm
A08:	120 mm
A09:	30 mm
A10:	11 mm



Vostermans Ventilation B.V.
Venlo - The Netherlands
+31 (0)77 389 32 32
ventilation@vostermans.com
www.vostermans.com

Vostermans Ventilation Inc.
Bloomington, IL - U.S.A.
+1 309 827 9798
ventilation@vostermansusa.com
www.vostermansusa.com

Vostermans Ventilation S.A.R.L.
Evreux Cedex - France
+33 (0)2 32 38 11 00
ventilation@vostermansfrance.com
www.vostermans.com

Vostermans Ventilation Sdn. Bhd.
Tmn Klang Jaya - Malaysia
+60 (0)33324 3638
ventilation@vostermansasia.com
www.vostermansasia.com