

Article number: V4S2500I21100

Productgroup: Panel fans

Technical data

Voltage	U	230	V
Phase		1	~
Frequency		50	Hz
Speed		1425	RPM
Power consumption	P _e	30	W
Nominal current	I	0.1	A
Maximum current	I	0.1	A
Capacitor		01/400	μF
Ambient temperature	T _{amb min/max}	-25...40	°C
Insulation Class		CLB	
IP Class Fan		IP44	
Weight		2.9	kg
Packing dimensions		345x340x210	mm

Fan details

Impeller blades	0
Impeller type	0
Impeller system	0
Impeller material	0


Control options

Triac controller	Yes
Transformer	Yes
Frequency drive	No
Intelligent Fan Drive	Yes

* All control options including single phase control frequency are available. Please contact Vostermans Ventilation Sales for more information

Characteristics

0 Pa 950 m³/h
50 Pa 430 m³/h

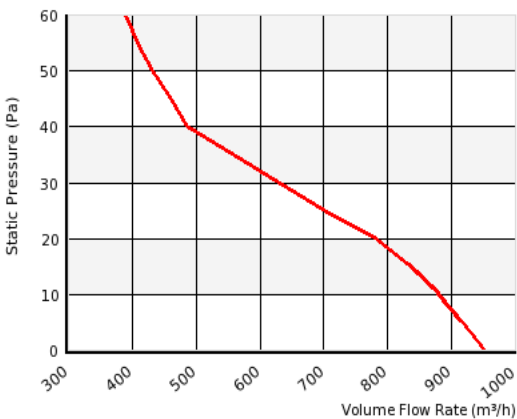


Please note: Picture may deviate from original product

Approval(s)



Dimensions

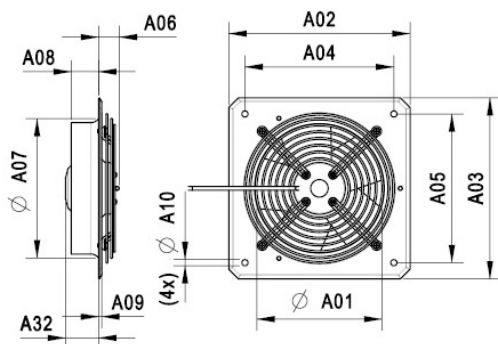

A01:	244 mm
A02:	330 mm
A03:	330 mm
A04:	280 mm
A05:	280 mm
A06:	33 mm
A07:	266 mm
A08:	46 mm
A09:	5 mm
A10:	10 mm



Vostermans Ventilation B.V.
Venlo - The Netherlands
+31 (0)77 389 32 32
ventilation@vostermans.com
www.vostermans.com

Vostermans Ventilation Inc.
Bloomington, IL - U.S.A.
+1 309 827 9798
ventilation@vostermansusa.com
www.vostermansusa.com

Vostermans Ventilation S.A.R.L.
Evreux Cedex - France
+33 (0)2 32 38 11 00
ventilation@vostermansfrance.com
www.vostermans.com

Vostermans Ventilation Sdn. Bhd.
Tmn Klang Jaya - Malaysia
+60 (0)33324 3638
ventilation@vostermansasia.com
www.vostermansasia.com